


Range-X Single Monitor Arm


MON061

Specifications


SIDE VIEW

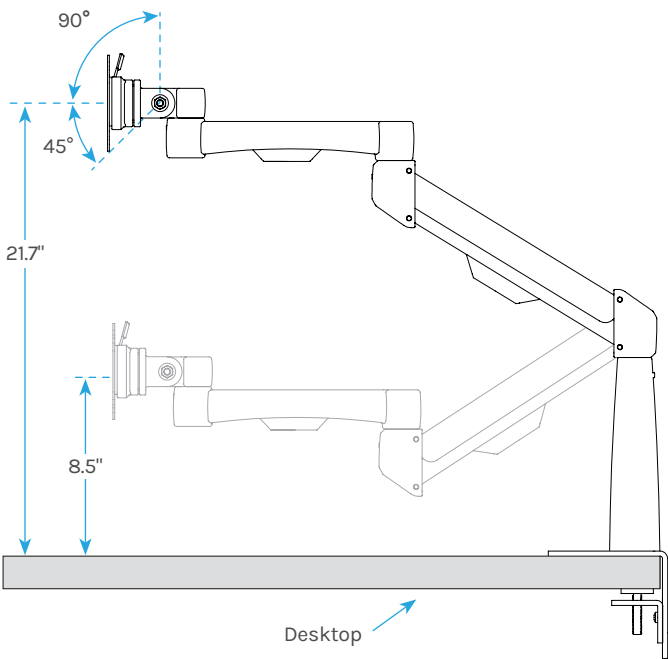

BACK VIEW

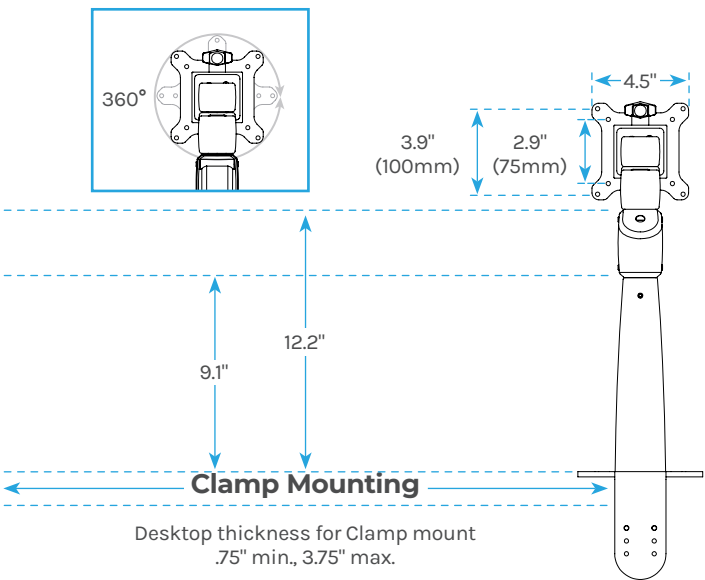

TOP VIEW

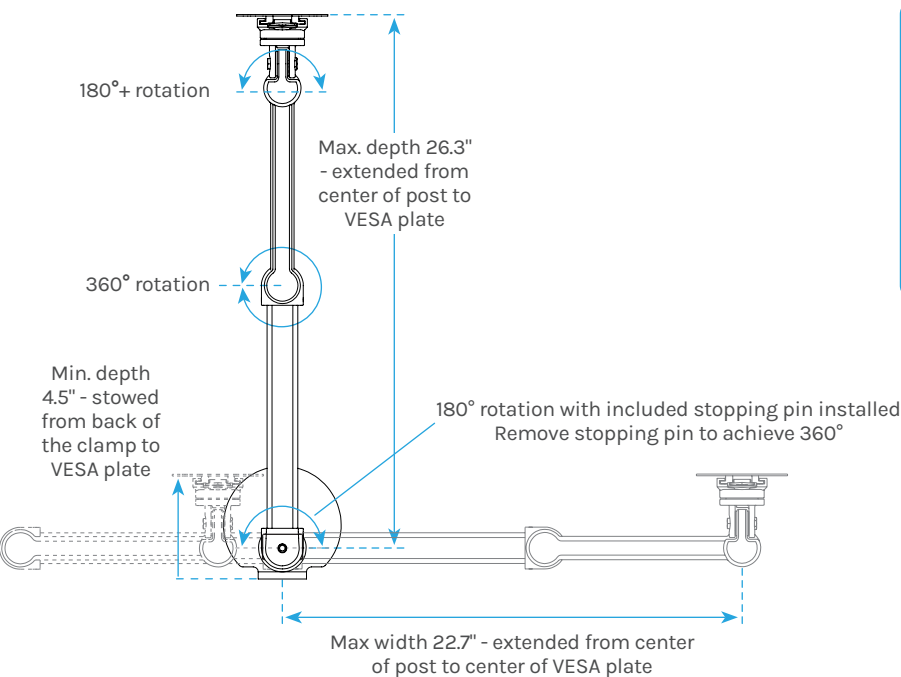

Bolt-Through Mounting

Desktop thickness for Bolt-thru mount 0.6" min, 2.1" max

Bolt is .39" in diameter

Hole diameter for Bolt-thru mount 0.4" min, 3.5" max

Warranty	15 year warranty on all UPLIFT Desk products. upliftdesk.com/warranty/
Product Weight	Monitor arm with clamp mount: 10.7 lb Monitor arm with bolt-through mount: 9.1 lb
Supports	One 3.75 - 17.6 lb monitor
Mounting method & desktop compatibility	Both clamp and bolt-through mounts are included. Clamp mount works with desktops that are between 0.75" to 3.75" thick. Bolt-through mount works with desktops that are between 0.6" - 2.1" thick.
Bolt-through mount hole diameter	0.4 - 3.5"
VESA compatibility	75mm and 100mm, quick-release
Height range (high, low)	8.5 - 21.7", measured from desk surface to center of VESA plate
Vertical articulation	13.2"
Forward reach	26.3", measured from center of post to front of VESA plate
Side extension	22.7" measured from center of post to center of VESA plate, with monitor arm extended straight out to the left or right
Collapsible	Down to 3.75" measured from center of post to front of VESA plate
Arm pivot	360° with stopping pin removed or 180° with stopping pin installed. Stopping pin is factory installed
Monitor tilt range	135° (+90/-45°)
Monitor pan range	180° (+/-90°) Rotation can be more than 180° depending on monitor size; the edge of larger monitors will hit the arm before smaller monitors will make contact
Monitor rotation	360° (portrait to landscape)
Available colors	Black, gray, white
Shipping dimensions & weight	19.1" L x 10.2" W x 6.1" H, 13 lb

Copyright Notice: This guide is a component of this UPLIFT Desk product. This guide is a part of the scope of delivery, even if the item is resold. This guide is also available on the UPLIFT Desk website: upliftdesk.com. These specifications are subject to United States copyright law.