


Pop Up Power Grommet

PDC013

UPLIFT DESK®
Work Better. Live Healthier

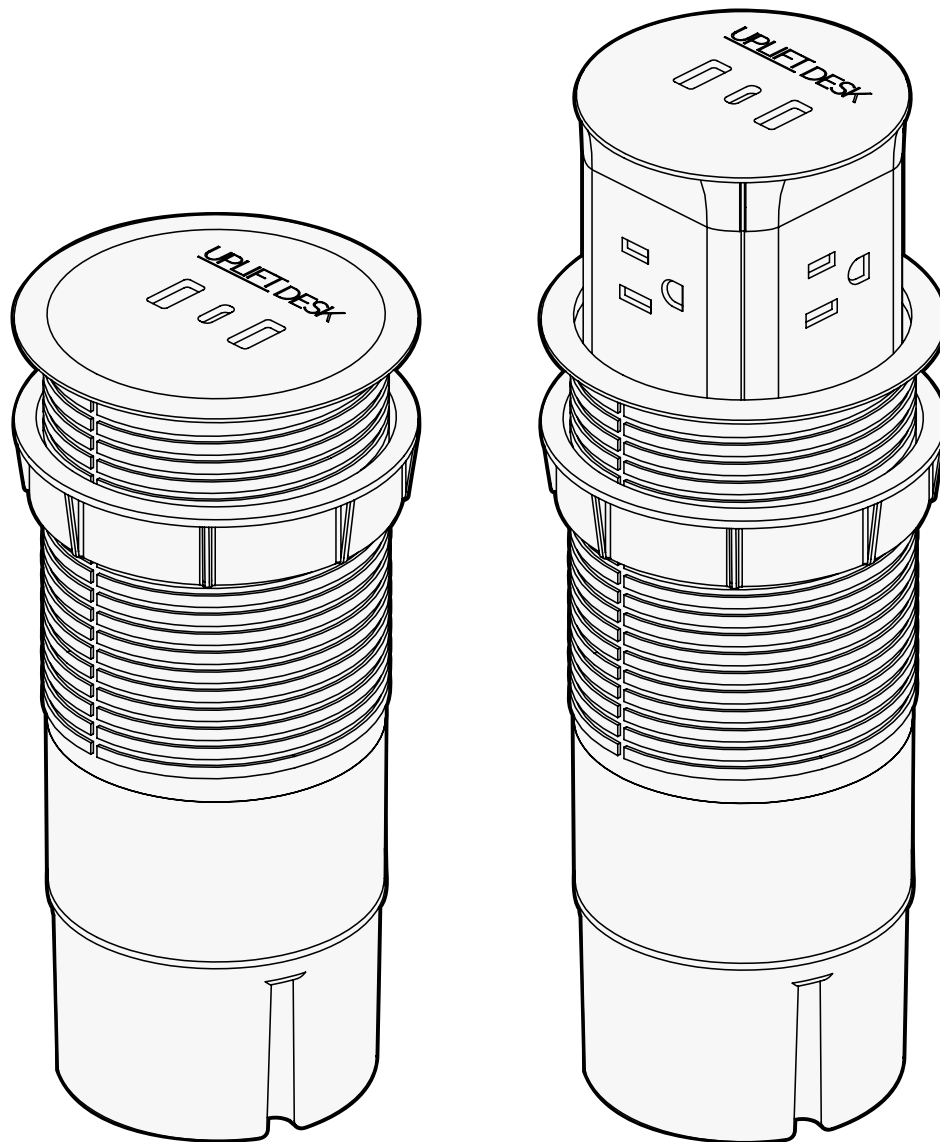

Scan QR code for
product webpage



Safety and Warnings



WARNING: Read all instructions before assembly. Failure to assemble or operate properly may result in damage or personal injury. Retain manual for future reference.



WARNING: For indoor use only. Use only in dry areas.



WARNING: To avoid overheating and possible damage to this product and other equipment, do not use it to power devices that exceed the designed ratings.



WARNING: This product must be installed and/or used in accordance with the appropriate electrical codes and regulations.



WARNING: Avoid getting any liquid on or in the unit, as it can cause shock and fire. If the unit gets wet, disconnect the power at the circuit breaker or outlet. Ensure the unit is completely dry before reconnecting to the power source.



WARNING: Do not attempt to open the unit or perform service on it. Dangerous voltages are present inside the unit during operation.




WARNING: The Pop Up Power Grommet needs a path to ground to work properly and should only be plugged directly into a grounded 120V outlet. Using a voltage converter is considered improper use and can cause damage to the unit.


Under no circumstances does the manufacturer accept warranty or liability claims for damages caused from improper use of this product. Please provide these instructions to any new user or owner of the product.

Package Contents

Pop Up Power Grommet

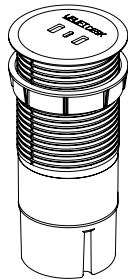

Locking Ring

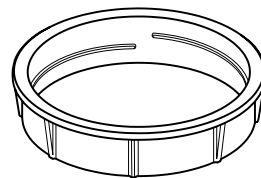


Installation of the Pop Up Power Grommet requires a hole through the desktop measuring 3.15" (80mm) in diameter and a desktop thickness between 0.75" and 3.5".

Ensure that there is 8" of clearance underneath the desktop directly below the grommet hole in which you plan to install the Power Grommet.




Step 1 - Remove Locking Ring

- The Pop Up Power Grommet ships with the Locking Ring installed. Unscrew the Locking Ring from the body of the Power Grommet.
- Once unscrewed, slide the Locking Ring completely off of the power cord and set it aside for the next step.

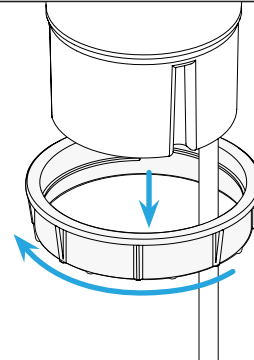


Step 2 - Insert Pop Up Power Grommet in Grommet Hole

- Feed the Pop Up Power Grommet's power cord through the grommet hole in the desktop from the top side.
- Place the Power Grommet into the grommet hole and lower it until it is flush with the surface of the desktop.
- Do not place any objects such as file cabinets directly below the Power Grommet. A full 8" of clearance under the desktop is needed for the power cord to bend without placing undue stress on the connection.

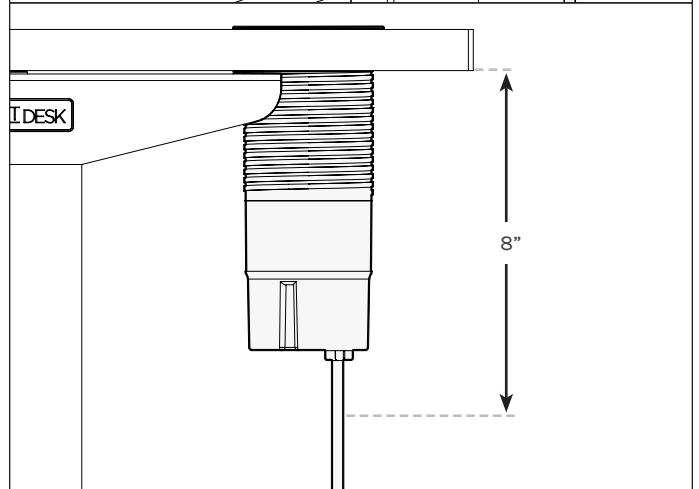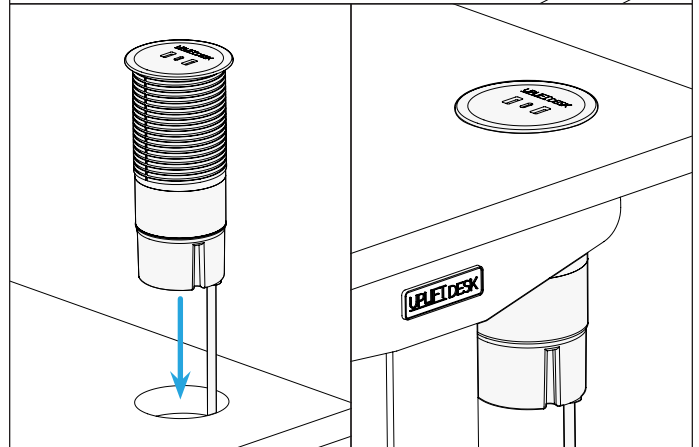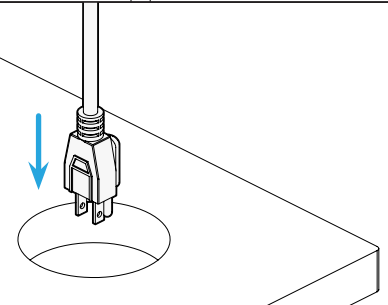


Step 3 - Replace the Locking Ring

- A. Slide the Locking Ring over the end of the power cord in the orientation shown.

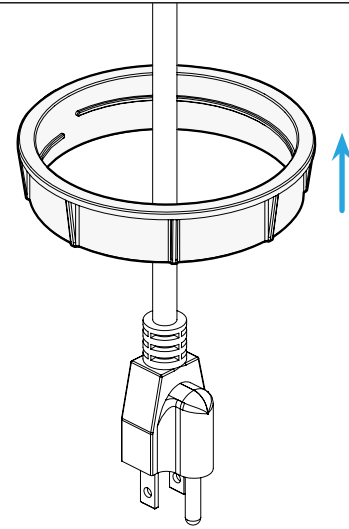


- B. Raise the Locking Ring up over the body of the Pop Up Power Grommet and begin to screw it onto the threaded portion of the body.

The Locking Ring should rotate smoothly when properly engaged with threads. If it does not rotate easily, it could be cross-threaded. Remove and try again.

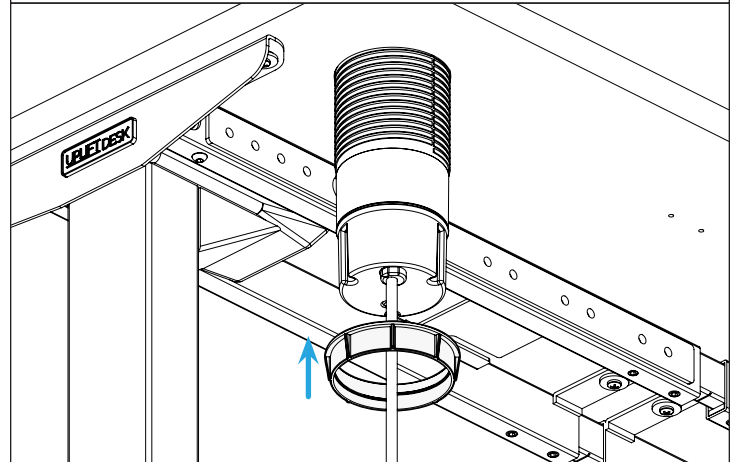


- C. Continue threading the Locking Ring onto the body of the Power Grommet until it is tight against the underside of the desktop.

If you need to adjust the orientation of the Power Grommet in the grommet hole, slightly loosen the Locking Ring, rotate the body as needed, and tighten the Locking Ring again.

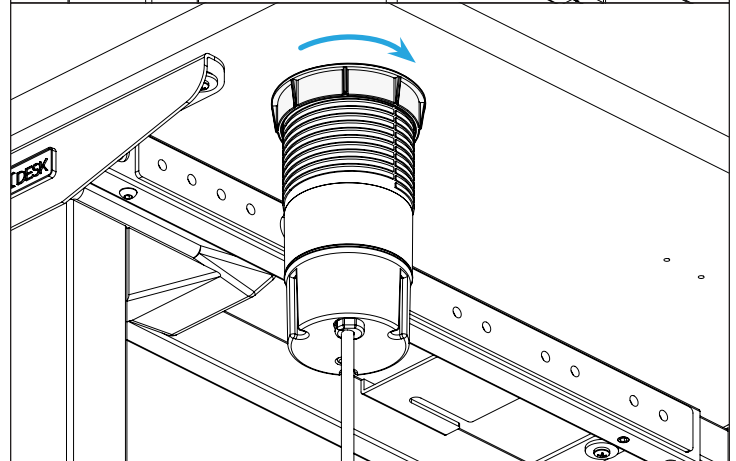


Step 4 - Using the Pop Up Power Grommet

- A. The Pop Up Power Grommet's power cord is 6' long. Be sure the outlet you plan to plug it into is close enough to avoid pulling on the cord if installed on a height adjustable desk. Plug the power cord into a grounded, 120V electrical outlet or surge protector.

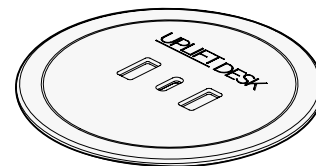

- B. The USB ports on the top surface can be used with the Power Grommet closed or popped up.
- C. To raise the Power Grommet, press down firmly on the top surface allowing it to pop up. In the raised position, access the four 120V grounded power outlets located on each vertical face.
- D. If there is a power surge and the Power Grommet stops functioning, press the reset button located on the bottom of the unit.

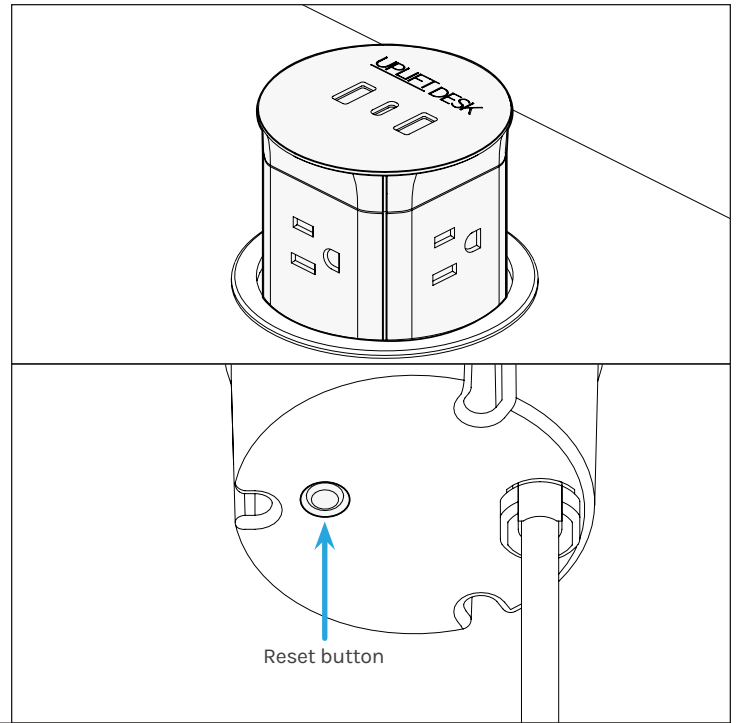

USB port specifications:

- Fast PD20W charging
- Either USB-A port used individually: 9V/2A, 12V/1.5A
- USB-C port used individually: 9V/2.22A, 12V/1.67A
- All USB ports used together: 5V/3A
- USB ports are for charging only and cannot be used for transferring data

Power Ratings:

- 1875W, 15A, 125V max
- 800J surge protection with reset button on bottom
- ETL safety listed in the US and Canada

[illegible]

This image shows a full page of blank, lined paper. It features approximately 20 evenly spaced horizontal grey lines across its entire width, providing a guide for handwriting or typing. The background is a clean, solid white color.



Work Better. Live Healthier

upliftdesk.com

info@upliftdesk.com

800-349-3839

512-614-3152

SAVE THIS MANUAL

Study this manual carefully. If this product is sold, please provide this manual to the buyer, installers, or support personnel operating the product.



Copyright Notice: This manual is a component of this UPLIFT Desk product. This manual is a part of the scope of delivery, even if the item is resold. This manual is also available on the UPLIFT Desk website: upliftdesk.com. This manual is subject to United States copyright law.